


Rugged Panel Terminals

RDC-19R

19" Rugged Touch Monitor

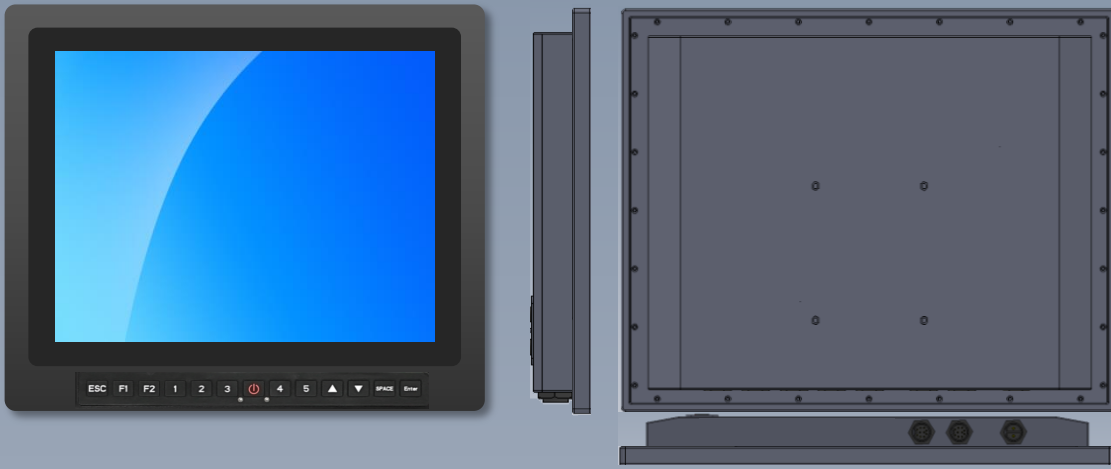

Features:

- Brightness : 1,000 nits for outdoor application
- Optical Bonding (Optional)
- Full-IP67 Protection
- Anti-Corrosion Housing Design
- Programmable Function Keys on Front Panel

Specification

Environment Tolerance :

• Operating Temperature	: -20 deg. C to 60 deg. C
• Storage Temperature	: -30 deg. C to 70 deg. C
• Humidity	: 10 to 95% (Non Condensing)
• Shock	: MIL-STD-810G Method 516.6
• Vibration	: MIL-STD-810G Method 514.6C-3
• Humidity	: MIL-STD-810G Method 507.5-7
• High Temperature	: MIL-STD-810G Method 501.5-II
• Low Temperature	: MIL-STD-810G Method 502.5
• IP Level	: Full IP67

Dimensions :

• Dimensions	: 500 (W) x 460(H) x 70 (D) mm
• Weight	: 11KG
• VESA	: 100 x 100 M6 VESA holes

Function Key :

• Power Button	: 1 x Power Button
• Up / Down Arrow	: Up/ Down arrow buttons
• Function keys	: F1, F2 function keys
• Number keys	: 1 – 5 number keys

Panel Specification :

• Size/ Type	: 19" (LED Backlight, with sunlight readable)
• Resolution	: 1280 x 1024
• Brightness	: 1,000 nits (High Brightness)
• Contrast Ratio	: 1000 : 1 (typ.)
• Max. Colors	: 16.7M
• Viewing Angle	: -85~ 85 (H); -80~ 80 (V)
• Touch Screen	: All flat 5-wire resistive touch

Input / Output :

• Power (IP67)	: 1 x AC Input
• USB (IP67)	: 1 x USB connector
• VGA (IP67)	: 1 x VGA Input

Order Options :

• Touch	: P-cap touch screen (for optional)
• AR Glass	: AR Glass (for optional)
• Protective Film	: Anti-Explosive Film (for optional)