

RCX-9000



Specification



System:

- CPU : Intel® 8/9th Generation LGA1151 chipsets (Core i7-9700T/ Core i7-9700TE)
- Chipset : Intel® H310 Chipsets
- Memory : DDR4 2133MHz SDRAM Max. 64GB
- Storage : 1 x Removable 2.5" SATA Bay
1 x M.2 M-key 2242
- Ethernet : GbE1: Intel I211-AT
GbE2: Intel I219V
- BIOS : AMI 128Mbit SPI BIOS
- mSATA : 1 x mSATA
- Expansions : 1 x M.2 E-key (shared with mPCIe)
- Watchdog Timer : 256 levels
- OS : Windows 10 Supported

Power Specification:

- Power Input : 12-24V DC Input
- Power Consumption : 50 watt (typical)

Dimensions

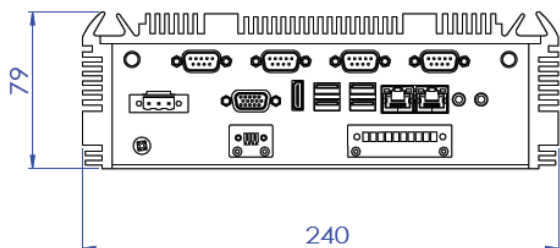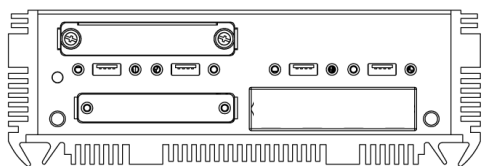

Features:

- Intel® LGA1151 8th /9th Generation Processor
- Fanless w/Aluminum
- Intel® H310 chipset

Input / Output :

Rear I/Os

- Ethernet : 2 x RJ45 GbE LAN
- Removable Bay : 1 x 2.5" HDD removable bay
- USB 2.0 : 2 x USB2.0

Front I/O

- Audio : 1 x Mic In, 1 x Line Out
- GPIO : 8-bit GPIO
- HDMI : 1 x HDMI output
- Power : 1 x terminal block power connector
- USB : 4 x USB3.0
- COM : 2 x RS232 (5V/12V TTL supported)
(4 x RS232 for optional)
- VGA : 1 x VGA output

Accessory :

- Driver CD : 1 x M/B driver CD
- Power Adapter : 1 x AC/DC Power adapter(optional)
- Power Cord : 1 x Power Cord (optional)
(type by region requested)

Dimensions/ Weight :

- Dimensions : 261.0 x 257.4 x 86.2 mm (W x D x H)
- Weight : 5.5 Kg

